

TCM

Innovative Machine
INOMA



Engine-Powered Forklift Trucks

1.5-1.8 ton

(Counter-Balanced Type)

SPECIFICATIONS

STANDARD SPECIFICATIONS

Characteristics	1		UNICARRIERS			
	2		FG15C13	FG15T13		
3	Load Capacity	kg	1500			
4	Load Center	mm	500			
5	Power Type		Gasoline			
6	Operator Position		Seated			
7	Tire Type	Front / Rear	Pneumatic			
8	Wheels (x = driven)	Front / Rear	2X / 2			
Dimensions	9	Maximum Fork Height	mm	3000		
	10	Free Lift	mm	155		
	13	Fork Size	L X W X T	920 X 100 X 35		
		Fork Spread (Outside)	Max. / Min.	920 / 200		
	14	Tilt Angle	Fwd. / Bwd.	6 / 12		
	15	Length to Fork Face	mm	2245		
	16	Overall Width	mm	1070		
	17	Mast Height Fork Lowered	mm	1995		
	18	Mast Height Fork Raised	mm	4030		
	19	Overhead Guard Height(EXB,EXC,EXK)	mm	2070		
		Overhead Guard Height(EXE,EXN)	mm	2130		
	20	Operator's Seat Height	mm	1015		
	21	Turning Radius (Outside)	mm	1980		
	Performance	22	Load Distance (Centerline of front axle to front face of forks)	mm	395	
		Rear Overhang	mm	425		
23		Basic Right Angle Stacking Aisle Width	mm	3495		
24		Travel, Max. (Fwd. / Rvs.)	Full Load	km/h	14.0 / 14.0	
			No Load	km/h	14.5 / 14.5	
25		Speeds	Lifting	Full Load	mm/sec	590
				No Load	mm/sec	670
			Lowering	Full Load	mm/sec	450
				No Load	mm/sec	550
28		Max. Drawbar Pull	Full Load	kN	9.3 14.5	
	No Load		kN	6.9		
30	Max. Gradeability*	Full Load	%	24 29		
		No Load	%	18		
Weight	32	Total Weight	kg	2510		
	33	Weight Distribution	Full Load	Front	kg	3510
			Rear	kg	500	
	34	No Load	Front	kg	1070	
Rear			kg	1440		
Chassis & Wheels	35	Tires	Number	Front / Rear	2 / 2	
			Size	Front	6.50-10-10PR	
			Rear	5.00-8-8PR		
	38	Wheelbase	mm	1425		
	39	Tread	Front	mm	890	
			Rear	mm	920	
		Backrest Height	mm	1000		
		Overhead Guard Clearance	mm	1035		
	Counterweight Height	mm	1110			
	Drawbar Pin Center Height	mm	495			
	Step Height / Floor Height	mm	420 / 650			
40	Underclearance	Min. with Load	mm	105		
		Center of Wheelbase	mm	105		
42	Brake	Service (Foot)		Hydraulic-Foot pedal		
		Parking		Mechanical-Hand lever		
Engine & Transmission	45	Battery	Voltage / Capacity (5HR)	V/AH	12 / 28	
	49	Internal Combustion Engine	Make / Model		GCT / K15	
	50		Rated Horsepower / r.p.m.	kW	25.0 / 2400	
	51		Rated Torque / r.p.m.	N-m	110.2 / 1600	
			Number of Cylinder		4	
			Piston Displacement	cc	1486	
			Alternator output	kW/Amp	0.60 / 50	
		Fuel Tank Capacity Type	liter	50		
	55	Transmission	Type		Manual Power-shift	
			Stage	Fwd.-Rvs.	2-2 1-1	
57	Operating Pressure	For Attachments	MPa	17.7		

NOTE : * Computed values.

		UNICARRIERS					
		FG18C13	FG18T13	FHG15C3	FHG15T3	FHG18C3	FHG18T3
		1750		1500		1750	
		500		500		500	
		Gasoline		Gasoline		Gasoline	
		Seated		Seated		Seated	
		Pneumatic		Pneumatic		Pneumatic	
		2X / 2		2X / 2		2X / 2	
		3000		3000		3000	
		155		155		155	
		920 X 100 X 35		920 X 100 X 35		920 X 100 X 35	
		920 / 200		920 / 200		920 / 200	
		6 / 12		6 / 12		6 / 12	
		2275		2275		2275	
		1100		1070		1100	
		1995		1995		1995	
		4030		4030		4030	
		2070		2070		2070	
		2130		2130		2130	
		1015		1045		1045	
		2010		1980		2010	
		395		395		395	
		455		425		455	
		3525		3495		3525	
		14.0 / 14.0		18.5 / 18.5		19.0 / 19.0	
		14.5 / 14.5		19.0 / 19.0		19.5 / 19.5	
		590		600		600	
		670		680		680	
		450		450		450	
		550		550		550	
		9.3	14.5	12.7	15.7	12.7	15.7
		6.9		6.9		6.9	
		20	24	25	33	22	31
		18	17	18		18	17
		2670		2510		2670	
		3880		3510		3880	
		540		500		540	
		1030		1070		1030	
		1640		1440		1640	
		2 / 2		2 / 2		2 / 2	
		6.50-10-10PR		6.50-10-10PR		6.50-10-10PR	
		5.00-8-8PR		5.00-8-8PR		5.00-8-8PR	
		1425		1425		1425	
		890		890		890	
		920		920		920	
		1000		1000		1000	
		1035		1005		1035	
		1110		1110		1110	
		495		495		495	
		420 / 650		420 / 650		420 / 650	
		105		105		105	
		105		105		105	
		Hydraulic-Foot pedal		Hydraulic-Foot pedal		Hydraulic-Foot pedal	
		Mechanical-Hand lever		Mechanical-Hand lever		Mechanical-Hand lever	
		12 / 28		12 / 28		12 / 28	
		GCT / K15		GCT / K21		GCT / K21	
		25.0 / 2400		34.6 / 2250		34.6 / 2250	
		110.2 / 1600		153.5 / 1600		153.5 / 1600	
		4		4		4	
		1486		2065		2065	
		0.60 / 50		0.60 / 50		0.60 / 50	
		50		50		50	
		Manual	Power-shift	Manual	Power-shift	Manual	Power-shift
		2-2	1-1	2-2	1-1	2-2	1-1
		17.7		17.7		17.7	


STANDARD SPECIFICATIONS

1	Manufacturer		UNICARRIERS		
			FD15T14	FD18T14	
2	Model				
3	Load Capacity		kg	1500 / 1750	
4	Load Center		mm	500 / 500	
5	Power Type			Diesel / Diesel	
6	Operator Position			Seated / Seated	
7	Tire Type	Front / Rear		Pneumatic / Pneumatic	
8	Wheels (x = driven)	Front / Rear		2X / 2 / 2X / 2	
9	Maximum Fork Height		mm	3000 / 3000	
10	Free Lift		mm	155 / 155	
13	Fork Size	L X W X T	mm	920 X 100 X 35 / 920 X 100 X 35	
	Fork Spread (Outside)	Max. / Min.	mm	920 / 200 / 920 / 200	
14	Tilt Angle	Fwd. / Bwd.	deg	6 / 12 / 6 / 12	
15	Length to Fork Face		mm	2245 / 2275	
16	Overall Width		mm	1070 / 1100	
17	Mast Height Fork Lowered		mm	1995 / 1995	
18	Mast Height Fork Raised		mm	4030 / 4030	
19	Overhead Guard Height(EXB,EXC,EXK)		mm	2070 / 2070	
	Overhead Guard Height(EXE,EXN)		mm	2130 / 2130	
20	Operator's Seat Height		mm	1015 / 1015	
21	Turning Radius (Outside)		mm	1980 / 2010	
22	Load Distance (Centerline of front axle to front face of forks)		mm	395 / 395	
	Rear Overhang		mm	425 / 455	
23	Basic Right Angle Stacking Aisle Width		mm	3495 / 3525	
24	Speeds	Travel, Max. (Fwd. / Rvs.)	Full Load	km/h	13.5 / 13.5 / 13.5 / 13.5
			No Load	km/h	12.0 / 12.0 / 12.0 / 12.0
25		Lifting	Full Load	mm/sec	530 / 490
			No Load	mm/sec	600 / 600
26	Lowering	Full Load	mm/sec	450 / 450	
		No Load	mm/sec	550 / 550	
28	Max. Drawbar Pull	Full Load	kN	13.7 / 13.7	
		No Load	kN	6.9 / 6.9	
30	Max. Gradeability*	Full Load	%	24 / 21	
		No Load	%	19 / 17	
32	Total Weight		kg	2540 / 2700	
33	Weight Distribution	Full Load	Front	kg	3530 / 3900
			Rear	kg	510 / 550
34		No Load	Front	kg	1090 / 1050
			Rear	kg	1450 / 1650
35	Tires		Number	Front / Rear	2 / 2 / 2 / 2
36	Size	Front		6.50-10-10PR / 6.50-10-10PR	
37		Rear		5.00-8-8PR / 5.00-8-8PR	
38	Wheelbase		mm	1425 / 1425	
39	Tread		mm	890 / 920	
	Rear		mm	920 / 920	
	Backrest Height		mm	1000 / 1000	
	Overhead Guard Clearance		mm	1035 / 1035	
	Counterweight Height		mm	1110 / 1110	
	Drawbar Pin Center Height		mm	495 / 495	
	Step Height / Floor Height		mm	420 / 650 / 420 / 650	
40	Underclearance		mm	105 / 105	
41	Center of Wheelbase		mm	105 / 105	
42	Brake			Hydraulic-Foot pedal / Hydraulic-Foot pedal	
43	Parking			Mechanical-Hand lever / Mechanical-Hand lever	
45	Battery		V/AH	12 / 52 / 12 / 52	
49	Make / Model			KUBOTA / D1503 / KUBOTA / D1503	
50	Rated Horsepower / r.p.m.		kW	17.5 / 2500 / 17.5 / 2500	
51	Rated Torque / r.p.m.		N-m	87.1 / 1600 / 87.1 / 1600	
52	Number of Cylinder			3 / 3	
	Piston Displacement		cc	1499 / 1499	
	Alternator output		kW/Amp	0.54 / 45 / 0.54 / 45	
	Fuel Tank Capacity Type		liter	50 / 50	
55	Transmission		Type	Power-shift / Power-shift	
	Stage		Fwd.-Rvs.	1-1 / 1-1	
57	Operating Pressure		MPa	17.7 / 17.7	


NOTE : * Computed values.

UNICARRIERS			
FHD15C3Z	FHD15T3Z	FHD18C3Z	FHD18T3Z
1500			1750
500			500
Diesel			Diesel
Seated			Seated
Pneumatic			Pneumatic
2X / 2			2X / 2
3000			3000
155			155
920 X 100 X 35			920 X 100 X 35
920 / 200			920 / 200
6 / 12			6 / 12
2245			2275
1070			1100
1995			1995
4030			4030
2070			2070
2130			2130
1045			1045
1980			2010
395			395
425			455
3495			3525
18.5 / 18.5	19.0 / 19.0	18.5 / 18.5	19.0 / 19.0
19.0 / 19.0	19.5 / 19.5	19.0 / 19.0	19.5 / 19.5
620			620
660			660
450			450
550			550
13.2	16.2	13.2	16.2
6.9			6.9
25	31	22	29
18			17
2610			2770
3550			3920
560			600
1110			1070
1500			1700
2 / 2			2 / 2
6.50-10-10PR			6.50-10-10PR
5.00-8-8PR			5.00-8-8PR
1425			1425
890			920
920			920
1000			1000
1005			1005
1110			1110
495			495
420 / 650			420 / 650
105			105
105			105
Hydraulic-Foot pedal			Hydraulic-Foot pedal
Mechanical-Hand lever			Mechanical-Hand lever
12 / 55			12 / 55
ISUZU / C240			ISUZU / C240
35.4 / 2500			35.4 / 2500
140 / 1800			140/1800
4			4
2369			2369
0.54 / 45			0.54 / 45
50			50
Manual	Power-shift	Manual	Power-shift
2-2	1-1	2-2	1-1
17.7			17.7


GROUND CLEARANCE	FD / FG15	FHD / FHG15
	FD / FG18	FHD / FHG18
	mm	mm
Mast	110	110
Frame	105	105
Front axle	125	125
Rear axle	125	125
Counter weight	135	135

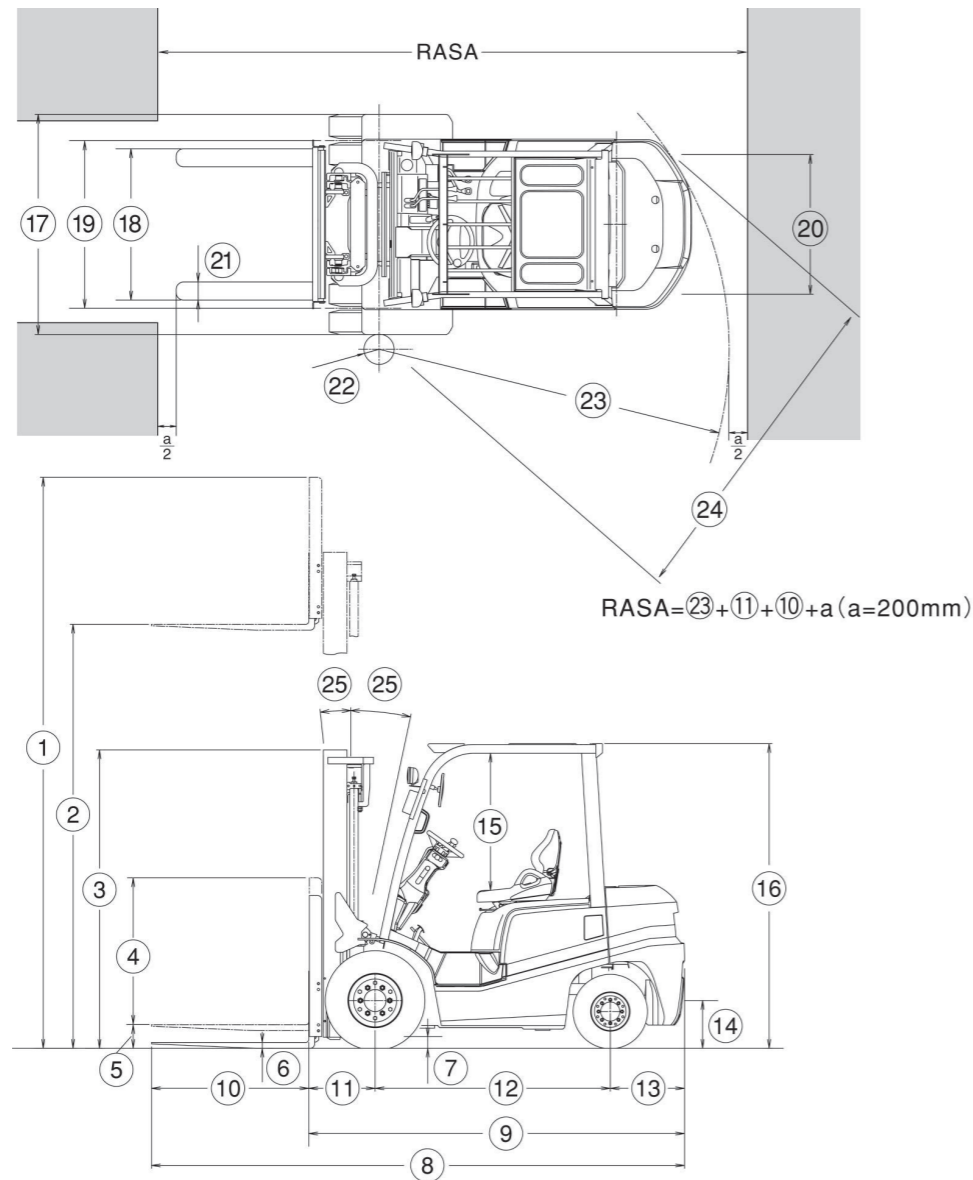

LOAD CHART 1.5-1.8t (Standard)

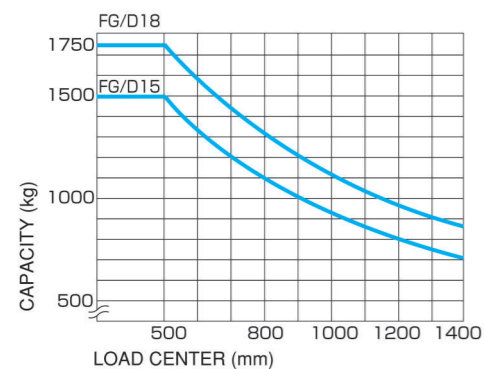

LOAD CHART 1.5-1.8t (High Power)

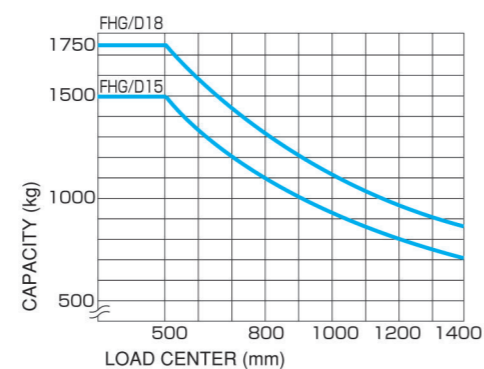

STANDARD DIMENSIONS

STANDARD DIMENSIONS

Model	FD / FG15	FD / FG18
	FHD / FHG15	FHD / FHG18
	mm	mm
① Overall height, fork raised(with backrest)	4030	4030
② Maximum fork height	3000	3000
③ Mast height, fork lowered	1995	1995
④ Backrest height	1000	1000
⑤ Free lift	155	155
⑥ Fork thickness	35	35
⑦ Ground clearance(front axle)	125	125
⑧ Overall length(with forks)	3165	3195
⑨ Length to fork face	2245	2275
⑩ Fork length	920	920
⑪ Load distance(centerline of front axle to front face of forks)	395	395
⑫ Wheelbase	1425	1425
⑬ Rear overhang	425	455
⑭ Drawbar Pin Center Height	495	495
⑮ Overhead guard clearance(from face of seat)*	FD / FG15•18=1035	FHD / FHG15•18=1005
⑯ Overall height(overhead guard)*	2070	2070
⑰ Overall width	1070	1100
⑱ Fork spread(outside)	200 - 920	200 - 920
⑲ Tread (front)	890	920
⑳ Tread (rear)	920	920
㉑ Fork width	100	100
㉒ Inside turning radius	110	95
㉓ Outside turning radius	1980	2010
㉔ Minimum intersecting aisle	1780	1800
㉕ Tilt angles(forward-backward)	6° - 12°	6° - 12°

NOTE : *European(EXE) export trucks: +60mm

DIMENSIONS WITH FRONT DUAL DRIVE WHEELS (option)

Model	FD / FG15	FD / FG18
	FHD / FHG15	FHD / FHG18
Tire size (front dual Type: DD)	4 x 4.50-12-8PR JL	
	mm	mm
⑰ Overall width	1255	1255
⑲ Tread (front)	980	980
㉒ Inside turning radius	90	90
㉓ Outside turning radius	2020	2050
㉔ Minimum intersecting aisle	1840	1860

Tire size (front dual Type: SDD)	4 x 6.50 -10-10PR JL	
	mm	mm
⑰ Overall width	1512	1512
⑲ Tread (front)	1110	1110
㉒ Inside turning radius	90	90
㉓ Outside turning radius	2095	2120
㉔ Minimum intersecting aisle	1940	1960



- UniCarriers Corporation retains the right to change these products and specifications without incurring any obligation relating to such changes.
- These products and specifications are subject to change without notice.
- Photos and illustrations may slightly differ from the actual trucks.
- Photos and illustrations may or may not include optional equipment and accessories.
- Features and specifications may vary depending on markets.
- Performance data and dimensions are nominal and subject to tolerances.
- Produced in ISO certified factory.

TCM

Innovative Machine
INOMA



Engine-Powered Forklift Trucks

2.0-3.5 ton

(Counter-Balanced Type)

SPECIFICATIONS

STANDARD SPECIFICATIONS

1	Manufacturer			UNICARRIERS				
				FG20C3	FG20T3	FG25C3	FG25T3	
2	Model							
3	Load Capacity			2000		2500		
4	Load Center			500		500		
5	Power Type			Gasoline		Gasoline		
6	Operator Position			Seated		Seated		
7	Tire Type		Front / Rear	Pneumatic		Pneumatic		
8	Wheels (x = driven)		Front / Rear	2X / 2		2X / 2		
9	Maximum Fork Height			3000		3000		
10	Free Lift			110		110		
13	Fork Size		L X W X T	1070 X 122 X 40		1070 X 122 X 40		
	Fork Spread (Outside)		Max. / Min.	1020 / 244		1020 / 244		
14	Tilt Angle		Fwd. / Bwd.	6 / 12		6 / 12		
15	Length to Fork Face			2485		2555		
16	Overall Width			1150		1150		
17	Mast Height Fork Lowered			2030		2030		
18	Mast Height Fork Raised			4030		4030		
19	Overhead Guard Height(EXB,EXK)			2070		2070		
	Overhead Guard Height(EXC,EXE,EXN)			2130		2130		
20	Operator's Seat Height			1045		1045		
21	Turning Radius (Outside)			2170		2240		
22	Load Distance (Centerline of front axle to front face of forks)		mm	450		450		
	Rear Overhang		mm	435		505		
23	Basic Right Angle Stacking Aisle Width			3890		3960		
24	24	Travel, Max. (Fwd. / Rvs.)	Full Load	km/h	18.5		18.5	
			No Load	km/h	19		19	
25		Lifting	Full Load	mm/sec	540		540	
			No Load	mm/sec	580		580	
26		Lowering	Full Load	mm/sec	450		450	
			No Load	mm/sec	550		550	
28	Max. Drawbar Pull	Full Load	kN	12.3	16.7	12.3	16.7	
		No Load	kN	8.3		8.3		
30	Max. Gradeability*	Full Load	%	20	28	19	24	
		No Load	%	20		20		
32	Total Weight			3220		3570		
33	Weight Distribution	Full Load	Front	kg	4620		5350	
			Rear	kg	600		720	
34		No Load	Front	kg	1400		1370	
			Rear	kg	1780		2200	
35		Number	Front / Rear	2 / 2		2 / 2		
36	Tires	Size	Front	7.00-12-12PR(I)		7.00-12-12PR(I)		
37		Rear	6.00-9-10PR(I)		6.00-9-10PR(I)			
38	Wheelbase			1600		1600		
39	Tread	Front	mm	970		970		
		Rear	mm	970		970		
	Backrest Height			1000		1000		
	Overhead Guard Clearance			1005		1005		
	Counterweight Height			1110		1110		
	Drawbar Pin Center Height			530		530		
	Step Height / Floor Height			435 / 650		435 / 650		
40	Underclearance	Min. with Load	mm	110		110		
41		Center of Wheelbase	mm	120		120		
42	Brake	Service (Foot)	Hydraulic-Foot pedal		Hydraulic-Foot pedal			
43		Parking	Mechanical-Hand lever		Mechanical-Hand lever			
45	Battery		V/AH	12 / 30		12 / 30		
49	Make / Model		GCT / K21	GCT / K21		GCT / K25		
50	Rated Horsepower / r.p.m.		kW	34.6 / 2250		39.5 / 2100		
51	Rated Torque / r.p.m.		N-m	153.5 / 1600		188.1 / 1600		
52	Internal Combustion Engine	Number of Cylinder	4		4			
		Piston Displacement	cc	2065		2488		
		Alternator output	kW/Amp	0.60 / 50		0.60 / 50		
		Fuel Tank Capacity Type	liter	70		70		
55	Transmission	Type	Manual	Power-shift	Manual	Power-shift		
		Stage	Fwd.-Rvs.	2-2	1-1	2-2	1-1	
57	Operating Pressure		For Attachments	MPa (psi)	17.7		17.7	

NOTE : * Computed values.

UNICARRIERS									
FG30C3	FG30T3	FHG20C3	FHG20T3	FHG25C3	FHG25T3	FHG30C3	FHG30T3	FG35T3S	
3000		2000		2500		3000		3500	
500		500		500		500		500	
Gasoline		Gasoline		Gasoline		Gasoline		Gasoline	
Seated		Seated		Seated		Seated		Seated	
pneumatic		pneumatic		pneumatic		pneumatic		Pneumatic	
2X / 2		2X / 2		2X / 2		2X / 2		2X / 2	
3000		3000		3000		3000		3000	
165		110		110		165		170	
1070 X 125 X 45		1070 X 122 X 40		1070 X 122 X 40		1070 X 125 X 45		1070 X 150 X 50	
1090 / 250		1020 / 244		1020 / 244		1090 / 250		1090 / 300	
6 / 12		6 / 12		6 / 12		6 / 12		6 / 12	
2705		2485		2555		2705		2800	
1225		1150		1150		1225		1290	
2075		2030		2030		2075		2135	
4260		4030		4030		4260		4255	
2090		2070		2070		2090		2140	
2150		2130		2130		2150		2200	
1070		1045		1045		1070		1120	
2400		2170		2240		2400		2470	
480		450		450		480		495	
525		435		505		525		605	
4150		3890		3960		4150		4265	
19		18.5		18.5		19		18.5	
19.5		19		19		19.5		19	
440		600		600		500		400	
490		620		620		520		450	
450		450		450		450		420	
550		550		550		550		450	
10.8	14.2	14.2	22.1	14.2	22.1	12.7	19.6	17.0	
9.8		8.3		8.3		9.8		9.8	
14	18	24	36	21	33	18	24	17	
20		20		18		20		16	
4250		3230		3580		4260		4820	
6350		4630		5350		6350		7235	
900		600		730		910		1085	
1620		1450		1370		1620		1685	
2630		1780		2210		2640		3135	
2 / 2		2 / 2		2 / 2		2 / 2		2 / 2	
28X9-15-12PR(I)		7.00-12-12PR(I)		7.00-12-12PR(I)		28X9-15-12PR(I)		250-15-16PR(I)	
6.50-10-10PR(I)		6.00-9-10PR(I)		6.00-9-10PR(I)		6.50-10-10PR(I)		6.50-10-12PR(I)	
1700		1600		1600		1700		1700	
1000		970		970		1000		1060	
970		970		970		970		970	
1220		1000		1000		1220		1220	
1005		1005		1005		1005		1005	
1130		1110		1110		1130		1180	
560		530		530		560		610	
460 / 680		435 / 650		435 / 650		460 / 680		485 / 730	
140		110		110		140		125	
145		120		120		145		190	
Hydraulic-Foot pedal		Hydraulic-Foot pedal		Hydraulic-Foot pedal		Hydraulic-Foot pedal		Hydraulic-Foot pedal	
Mechanical-Hand lever		Mechanical-Hand lever		Mechanical-Hand lever		Mechanical-Hand lever		Mechanical-Hand lever	
12 / 30		12 / 30		12 / 30		12 / 30		12 / 30	
GCT / K21		GCT / K25		GCT / K25		GCT / K25		GCT / K25	
34.6 / 2250		39.5 / 2100		39.5 / 2100		39.5 / 2100		39.5 / 2100	
153.5 / 1600		188.1 / 1600		188.1 / 1600		188.1 / 1600		188 / 1600	
4		4		4		4		4	
2065		2488		2488		2488		2488	
0.60 / 50		0.60 / 50		0.60 / 50		0.60 / 50		0.60 / 50	
70		70		70		70		70	
Manual	Power-shift	Manual	Power-shift	Manual	Power-shift	Manual	Power-shift	Power-shift	
2-2	1-1	2-2	1-1	2-2	1-1	2-2	1-1	1-1	
17.7		17.7		17.7		17.7		17.7	

STANDARD SPECIFICATIONS

1	Manufacturer		UNICARRIERS			
			FD20C3Z	FD20T3Z		
2	Model					
3	Load Capacity		kg	2000		
4	Load Center		mm	500		
5	Power Type			Diesel		
6	Operator Position			Seated		
7	Tire Type	Front / Rear		Pneumatic		
8	Wheels (x = driven)	Front / Rear		2X / 2		
9	Maximum Fork Height		mm	3000		
10	Free Lift		mm	110		
13	Fork Size	L X W X T	mm	1070 X 122 X 40		
	Fork Spread (Outside)	Max. / Min.	mm	1020 / 245		
14	Tilt Angle	Fwd. / Bwd.	deg	6 / 12		
15	Length to Fork Face		mm	2485		
16	Overall Width		mm	1150		
17	Mast Height Fork Lowered		mm	2030		
18	Mast Height Fork Raised		mm	4030		
19	Overhead Guard Height(EXB,EXK)		mm	2070		
	Overhead Guard Height(EXC,EXE,EXN)		mm	2130		
20	Operator's Seat Height		mm	1045		
21	Turning Radius (Outside)		mm	2170		
22	Load Distance (Centerline of front axle to front face of forks)		mm	450		
	Rear Overhang		mm	435		
23	Basic Right Angle Stacking Aisle Width		mm	3890		
24	Speeds	Travel, Max. (Fwd. / Rvs.)	Full Load	km/h	17.5	18
			No Load	km/h	18	18.5
25		Lifting	Full Load	mm/sec	530	
			No Load	mm/sec	570	
26	Lowering	Full Load	mm/sec	450		
		No Load	mm/sec	550		
28	Max. Drawbar Pull	Full Load	kN	11.7	13.7	
		No Load	kN	8.3		
30	Max. Gradeability*	Full Load	%	21	25	
		No Load	%	20		
32	Total Weight		kg	3320		
33	Weight Distribution	Full Load	Front	kg	4670	
			Rear	kg	650	
34	No Load	Front	kg	1490		
		Rear	kg	1830		
35	Tires	Number	Front / Rear	2 / 2		
		Size	Front	7.00-12-12PR(I)		
37		Rear	6.00-9-10PR(I)			
38	Wheelbase		mm	1600		
39	Tread	Front	mm	970		
		Rear	mm	970		
	Backrest Height		mm	1000		
	Overhead Guard Clearance		mm	1005		
	Counterweight Height		mm	1110		
	Drawbar Pin Center Height		mm	530		
	Step Height / Floor Height		mm	435 / 650		
40	Underclearance	Min. with Load	mm	110		
41		Center of Wheelbase	mm	120		
42	Brake	Service (Foot)		Hydraulic-Foot pedal		
43		Parking		Mechanical-Hand lever		
45	Battery		V/AH	12 / 55		
49	Make / Model			ISUZU / C240		
50	Rated Horsepower / r.p.m.		kW	35.4 / 2500		
51	Rated Torque / r.p.m.		N-m	140 / 1800		
	Number of Cylinder			4		
	Piston Displacement		cc	2369		
	Alternator output		kW/Amp	0.54 / 45		
	Fuel Tank Capacity Type		liter	70		
55	Transmission	Type		Manual	Power-shift	
		Stage	Fwd.-Rvs.	2-2	1-1	
57	Operating Pressure		For Attachments	MPa (psi)	17.7	

NOTE : * Computed values.

		UNICARRIERS				
		FD25C3Z	FD25T3Z	FD30C3Z	FD30T3Z	FD35T3S
		2500		3000		3500
		500		500		500
		Diesel		Diesel		Diesel
		Seated		Seated		Seated
		Pneumatic		Pneumatic		Pneumatic
		2X / 2		2X / 2		2X / 2
		3000		3000		3000
		110		165		170
		1070 X 122 X 40		1070 X 125 X 45		1070 X 150 X 50
		1020 / 245		1090 / 250		1090 / 300
		6 / 12		6 / 12		6 / 12
		2555		2705		2800
		1150		1225		1290
		2030		2075		2135
		4030		4260		4255
		2070		2090		2140
		2130		2150		2200
		1045		1070		1120
		2240		2400		2470
		450		480		495
		505		525		605
		3960		4150		4235
		17.5	18	18.5		19
		18	18.5	19		19.5
		530		450		460
		570		460		490
		450		450		420
		550		450		450
		11.7	13.7	10.8	13.7	18.1
		8.3		9.8		10.8
		18	25	15	18	18
		18		20		17
		3680		4370		4940
		5400		6420		7290
		780		950		1150
		1420		1690		1740
		2260		2680		3200
		2 / 2		2 / 2		2 / 2
		7.00-12-12PR(I)		28X9-15-12PR(I)		250-15-16PR(I)
		6.00-9-10PR(I)		6.50-10-10PR(I)		6.50-10-12PR(I)
		1600		1700		1700
		970		1000		1060
		970		970		970
		1000		1220		1220
		1005		1005		1005
		1110		1130		1180
		530		560		610
		435 / 650		460 / 680		485 / 730
		110		140		125
		120		145		190
		Hydraulic-Foot pedal		Hydraulic-Foot pedal		Hydraulic-Foot pedal
		Mechanical-Hand lever		Mechanical-Hand lever		Mechanical-Hand lever
		12 / 55		12 / 55		12 / 64
		ISUZU / C240		ISUZU / C240		GCT / QD32
		35.4 / 2500		35.4 / 2500		44 / 2300
		140 / 1800		140 / 1800		189 / 1800
		4		4		4
		2369		2369		3153
		0.54 / 45		0.54 / 45		0.72 / 60
		70		70		70
		Manual	Power-shift	Manual	Power-shift	Power-shift
		2-2	1-1	2-2	1-1	1-1
		17.7		17.7		17.7

Wide View Mast

Wide View Mast VM

Mast Model	Rated Capacity/ 500mm load center (kg)				Max. Fork Height	Overall Mast Height			Tilting Angle F/B deg	(1) Service weight(kg)					
	FG20T3 / FD20T3Z		FG25T3 / FD25T3Z			Lowered	(1)Raised with Backrest	FG20T3 FG20C3			FG25T3 FG25C3				
	PNEUMATIC	UNIQUE(SE)	PNEUMATIC	UNIQUE(SE)				S		DD	SDD	S	DD	SDD	
	mm	mm	mm	mm		mm	mm	mm		mm	mm	mm	mm		
VM250	2000	2000	2500	2500	2500	1780	3530	6-10	3170	3275	3290	3530	3635	3650	
VM270	2000	2000	2500	2500	2700	1880	3730	6-10	3185	3290	3305	3545	3650	3665	
VM300	2000	2000	2500	2500	3000	2030	4030	6-12	3210	3315	3330	3570	3675	3690	
VM330	2000	2000	2500	2500	3300	2180	4330	6-12	3235	3340	3355	3595	3700	3715	
VM350	2000	2000	2500	2500	3500	2280	4530	6-12	3250	3355	3370	3610	3715	3730	
VM375	2000	2000	2500	2500	3750	2405	4780	6-6 *6-12	3270	3375	3390	3630	3735	3750	
VM400	2000	2000	2500	2500	4000	2580	5030	6-6 *6-12	3325	3430	3445	3685	3790	3805	
VM425	1950 *2000	1950 *2000	2450 *2500	2450 *2500	4250	2705	5280	6-6 *6-12	3345	3450	3465	3705	3810	3825	
VM450	1900 *1950	1900 *1950	2150 *2450	2150 *2450	4500	2830	5530	6-6 *6-12	3365	3470	3485	3725	3830	3845	
VM475	1800 *1850	1800 *1850	1850 *2350	2200 *2350	4750	2955	5780	6-6 *6-6	3385	3490	3505	3745	3850	3865	
VM500	1650 *1700	1700	1700 *2250	2000 *2250	5000	3080	6030	6-6 *6-6	3405	3510	3525	3765	3870	3885	
VM550	*1500	*1500	*1700	*1700	5500	3380	6530	*3-6	—	3585	3600	—	3945	3960	
VM600	*1300	*1300	*1400	*1400	6000	3630	7030	*3-6	—	3625	3640	—	3985	4000	

NOTE : (1) Weight for diesel model: +110kg(C240)

Wide View Full Free 2-Stage Mast VFM

Mast Model	Rated Capacity/ 500mm load center (kg)				Max. Fork Height	Overall Mast Height			Tilting Angle F/B deg	(3) Service weight(kg)					
	FG20T3 / FD20T3Z		FG25T3 / FD25T3Z			Lowered	(1)Raised with Backrest	(2)Free lift with Backrest		FG20T3 FG20C3			FG25T3 FG25C3		
	PNEUMATIC	UNIQUE(SE)	PNEUMATIC	UNIQUE(SE)						S	DD	SDD	S	DD	SDD
	mm	mm	mm	mm		mm	mm	mm		mm	mm	mm	mm		
VFM250	2000	2000	2500	2500	2500	1780	3530	780	6-10	3225	3330	3345	3585	3690	3705
VFM270	2000	2000	2500	2500	2700	1880	3730	880	6-10	3245	3350	3365	3605	3710	3725
VFM300	2000	2000	2500	2500	3000	2030	4030	1030	6-12	3270	3375	3390	3630	3735	3750
VFM330	2000	2000	2500	2500	3300	2180	4330	1180	6-12	3295	3400	3415	3655	3760	3775
VFM350	2000	2000	2500	2500	3500	2280	4530	1280	6-12	3310	3415	3430	3670	3775	3790
VFM375	2000	2000	2500	2500	3750	2405	4780	1405	6-6 *6-12	3330	3435	3450	3690	3795	3810
VFM400	2000	2000	2500	2500	4000	2580	5030	1580	6-6 *6-12	3390	3495	3510	3750	3855	3870
VFM425	1950 *2000	1950 *2000	2450 *2500	2450 *2500	4250	2705	5280	1705	6-6 *6-12	3410	3515	3530	3770	3875	3890
VFM450	1900 *1950	1900 *1950	2150 *2450	2150 *2450	4500	2830	5530	1830	6-6 *6-12	3435	3540	3555	3795	3900	3915
VFM475	1800 *1850	1800 *1850	1850 *2350	2200 *2350	4750	2955	5780	1955	6-6 *6-6	3455	3560	3575	3815	3920	3935
VFM500	1650 *1700	1700	1700 *2250	2000 *2250	5000	3080	6030	2080	6-6 *6-6	3475	3580	3595	3835	3940	3955
VFM550	*1500	*1500	*1700	*1700	5500	3380	6530	2380	*3-6	—	3660	3675	—	4020	4035
VFM600	*1300	*1300	*1400	*1400	6000	3630	7030	2630	*3-6	—	3700	3715	—	4060	4075

NOTE : (1) For height without backrest: -385mm
(2) For free lift without backrest: +385mm
(3) Weight for without backrest: -20kg
Weight for diesel model: +110kg(C240)

Wide View Full Free 3-Stage Mast VFHM

Mast Model	Rated Capacity/ 500mm load center (kg)				Max. Fork Height	Overall Mast Height			Tilting Angle F/B deg	(3) Service weight(kg)					
	FG20T3 / FD20T3Z		FG25T3 / FD25T3Z			Lowered	(1)Raised with Backrest	(2)Free lift with Backrest		FG20T3 FG20C3			FG25T3 FG25C3		
	PNEUMATIC	UNIQUE(SE)	PNEUMATIC	UNIQUE(SE)						S	DD	SDD	S	DD	SDD
	mm	mm	mm	mm		mm	mm	mm		mm	mm	mm	mm		
VFHM360	2000	2000	2500	2500	3600	1780	4630	780	6-6 *6-10	3365	3470	3485	3725	3830	3845
VFHM400	2000	2000	2500	2500	4000	1905	5030	905	6-6 *6-10	3395	3500	3515	3755	3860	3875
VFHM435	1900 *2000	1900 *2000	2200 *2400	2300 *2400	4350	2030	5380	1030	6-6 *6-10	3425	3530	3545	3785	3890	3905
VFHM480	1700 *1900	1800 *1900	1900 *2300	2200 *2300	4800	2180	5830	1180	6-6 *6-10	3455	3560	3575	3815	3920	3935
VFHM500	1500 *1800	1750 *1800	1600 *2250	2000 *2250	5000	2280	6030	1280	6-6 *6-10	3480	3585	3600	3840	3945	3960
VFHM540	1200 *1750	1650 *1750	1300 *2150	1700 *2150	5400	2405	6430	1405	3-6 *3-6	3510	3615	3630	3870	3975	3990
VFHM600	900 *1650	1100 *1650	950 *1800	1100 *1800	6000	2630	7030	1630	3-6 *3-6	3605	3710	3725	3965	4070	4085
VFHM650	*1500	*1500	*1550	*1550	6500	2845	7530	1845	*3-3	—	3765	3780	—	4125	4140
VFHM700	*1250	*1250	*1250	*1250	7000	3065	8030	2065	*3-3	—	3820	3835	—	4180	4195

NOTE : (1) For height without backrest: -455mm
(2) For free lift without backrest: +455mm
(3) Weight for without backrest: -20kg
Weight for diesel model: +110kg(C240)

NOTE :

Rated capacity with (*): Shows capacity with DD: front dual tires.
Service weight of VM/VFM550-600 and of VFHM650-700 represents the weight of vehicles equipped with "SDD:special dual tires".
Lifting speed with VFM/VFHM mast: with VFM FG 480mm/s with load. 520mm/s without load.
FD 440mm/s with load. 500mm/s without load.
with VFHM FG 500mm/s with load. 540mm/s without load.
FD 460mm/s with load. 520mm/s without load.
Lowering speed with VFM/VFHM mast: 400mm/s with load. 350mm/s without load.
Overall vehicle length with VFHM mast: +15mm longer than of standard model with VM/VFM mast.

Wide View Mast

Wide View Full Free 2-Stage Mast VFW (4CYLINDER)

Mast Model	Rated Capacity/ 500mm load center (kg)				Max. Fork Height	Overall Mast Height			Tilting Angle F/B deg	(3) Service weight(kg)					
	FG20T3 / FD20T3Z		FG25T3 / FD25T3Z			Lowered	(1)Raised with Backrest	(2)Free lift with Backrest		FG20T3 FG20C3			FG25T3 FG25C3		
	PNEUMATIC	UNIQUE(SE)	PNEUMATIC	UNIQUE(SE)						S	DD	SDD	S	DD	SDD
	mm	mm	mm	mm		mm	mm	mm		mm	mm	mm	mm		
VFW300	1900	1900	2400	2400	3000	2045	4030	1045	6-12	3280	3385	3505	3640	3745	3865
VFW330	1900	1900	2400	2400	3300	2195	4330	1195	6-12	3310	3415	3535	3670	3775	3895
VFW350	1900	1900	2400	2400	3500	2295	4530	1295	6-12	3325	3430	3550	3685	3790	3910
VFW375	1800 *1900	1800 *1900	2350	2350	3750	2420	4780	1420	6-6 6-12	3350	3455	3575	3710	3815	3935
VFW400	1800 *1900	1800 *1900	2300 *2350	2300 *2350	4000	2595	5030	1595	6-6 6-12	3410	3515	3635	3770	3875	3995

NOTE : (1) For height without backrest: -455mm
(2) For free lift without backrest: +455mm
(3) Weight for without backrest: -20kg
Weight for diesel model: +110kg(C240)

Wide View Full Free 3-Stage Mast VFHW (4CYLINDER)

Mast Model	Rated Capacity/ 500mm load center (kg)				Max. Fork Height	Overall Mast Height			Tilting Angle F/B deg	(3) Service weight(kg)					
	FG20T3 / FD20T3Z		FG25T3 / FD25T3Z			Lowered	(1)Raised with Backrest	(2)Free lift with Backrest		FG20T3 FG20C3			FG25T3 FG25C3		
	PNEUMATIC	UNIQUE(SE)	PNEUMATIC	UNIQUE(SE)						S	DD	SDD	S	DD	SDD
	mm	mm	mm	mm		mm	mm	mm		mm	mm	mm	mm		
VHW435	1800 *1900	1850 *1900	2200 *2400	2300 *2400	4350	2045	5380	1045	6-6 6-10	3425	3530	3650	3785	3890	4010
VHW480	1700 *1900	1800 *1900	1900 *2300	2200 *2300	4800	2195	5830	1195	6-6 6-10	3470	3575	3695	3830	3935	4055
VHW500	1500 *1800	1750 *1800	1600 *2250	2000 *2250	5000	2295	6030	1295	6-6 6-10	3495	3600	3720	3855	3960	4080
VHW540	1200 *1750	1650 *1750	1300 *2150	1700 *2150	5400	2420	6430	1420	3-6	3520	3625	3745	3880	3985	4105
VHW550	1150 *1750	1600 *1750	1250 *2100	1600 *2100	5500	2460	6530	1460	3-6	3530	3635	3755	3890	3995	4115

NOTE : (1) For height without backrest: -455mm
(2) For free lift without backrest: +455mm
(3) Weight for without backrest: -20kg
Weight for diesel model: +110kg(C240)

NOTE :

Rated capacity with (*): Shows capacity with DD: front dual tires.
Lifting speed with VFM/VFHM mast: with VFM FG 450mm/s with load. 490mm/s without load.
FD 440mm/s with load. 480mm/s without load.
with VFHM FG 460mm/s with load. 510mm/s without load.
FD 450mm/s with load. 500mm/s without load.
Lowering speed with VFM/VFHM mast: 420mm/s with load. 380mm/s without load.
Overall vehicle length with VFW/VFHW(4CYLINDER) mast: +35mm longer than of standard model with VM mast.

Wide View Mast

Wide View Mast VM

Mast Model	Rated Capacity/ 500mm load center (kg)		Max. Fork Height mm	Overall Mast Height		Tilting Angle F/B deg	(1) Service weight(kg)		
	FG30T3 / FD30T3Z FG30C3 / FD30C3Z			Lowered mm	(1)Raised with Backrest mm		FG30T3 FG30C3		
	PNEUMATIC	UNIQUE(SE)					S	DD	SDD
VM250	3000	3000	2500	1820	3760	6-10	4210	4245	4360
VM270	3000	3000	2700	1920	3960	6-10	4225	4260	4375
VM300	3000	3000	3000	2075	4260	6-12	4250	4285	4400
VM330	3000	3000	3300	2225	4560	6-12	4275	4310	4425
VM350	3000	3000	3500	2325	4760	6-12	4290	4325	4440
VM375	3000	3000	3750	2450	5010	6-6 *6-12	4310	4345	4460
VM400	3000	3000	4000	2625	5260	6-6 *6-12	4370	4405	4520
VM425	2900 *3000	3000	4250	2750	5510	6-6 *6-12	4390	4425	4540
VM450	2800 *3000	3000	4500	2875	5760	6-6 *6-12	4410	4445	4560
VM475	2750 *2900	2900	4750	3000	6010	6-6 *6-6	4430	4465	4580
VM500	2700 *2850	2850	5000	3125	6260	6-6 *6-6	4455	4490	4605
VM550	*2400	*2400	5500	3425	6760	*3-6	—	4565	4680
VM600	*2000	*2000	6000	3675	7260	*3-6	—	4605	4720

NOTE : (1) Weight for diesel model: +120kg(C240)

Wide View Full Free 2-Stage Mast VFM

Mast Model	Rated Capacity/ 500mm load center (kg)		Max. Fork Height mm	Overall Mast Height		(2)Free lift with Backrest mm	Tilting Angle F/B deg	(3) Service weight(kg)		
	FG30T3 / FD30T3Z FG30C3 / FD30C3Z			Lowered mm	(1)Raised with Backrest mm			FG30T3 FG30C3		
	PNEUMATIC	UNIQUE(SE)						S	DD	SDD
VFM250	3000	3000	2500	1820	3760	600	6-10	4250	4245	4360
VFM270	3000	3000	2700	1920	3960	700	6-10	4265	4260	4375
VFM300	3000	3000	3000	2075	4260	850	6-12	4295	4285	4400
VFM330	3000	3000	3300	2225	4560	1000	6-12	4320	4310	4425
VFM350	3000	3000	3500	2325	4760	1100	6-12	4335	4325	4440
VFM375	3000	3000	3750	2450	5010	1225	6-6 *6-12	4360	4345	4460
VFM400	3000	3000	4000	2625	5260	1400	6-6 *6-12	4425	4405	4520
VFM425	2900 *3000	3000	4250	2750	5510	1525	6-6 *6-12	4445	4425	4540
VFM450	2800 *3000	3000	4500	2875	5760	1650	6-6 *6-12	4465	4445	4560
VFM475	2750 *2900	2900	4750	3000	6010	1775	6-6 *6-6	4490	4465	4580
VFM500	2700 *2850	2850	5000	3125	6260	1900	6-6 *6-6	4510	4490	4605
VFM550	*2400	*2400	5500	3425	6760	2200	*3-6	—	4565	4680
VFM600	*2000	*2000	6000	3675	7260	2450	*3-6	—	4605	4720

NOTE : (1) For height without backrest: -520mm
(2) For free lift without backrest: +520mm
(3) Weight for without backrest: -30kg
Weight for diesel model: +120kg(C240)

Wide View Full Free 3-Stage Mast VFHM

Mast Model	Rated Capacity/ 500mm load center (kg)		Max. Fork Height mm	Overall Mast Height		(2)Free lift with Backrest mm	Tilting Angle F/B deg	(3) Service weight(kg)		
	FG30T3 / FD30T3Z FG30C3 / FD30C3Z			Lowered mm	(1)Raised with Backrest mm			FG30T3 FG30C3		
	PNEUMATIC	UNIQUE(SE)						S	DD	SDD
VFHM360	3000	3000	3600	1825	4860	600	6-6 *6-10	4395	4430	4545
VFHM400	3000	3000	4000	1950	5260	725	6-6 *6-10	4425	4460	4575
VFHM435	2900 *3000	2900 *3000	4350	2075	5610	850	6-6 *6-10	4460	4495	4610
VFHM480	2800 *2900	2800 *2900	4800	2225	6060	1000	6-6 *6-10	4495	4530	4645
VFHM500	2600 *2750	2750	5000	2325	6260	1100	6-6 *6-10	4520	4555	4670
VFHM540	1900 *2650	2500 *2650	5400	2450	6660	1225	3-6 *3-6	4555	4590	4705
VFHM600	1400 *2100	1850 *2100	6000	2675	7260	1450	3-6 *3-6	4650	4685	4800
VFHM650	*1700	*1700	6500	2890	7760	1665	*3-3	—	4750	4865
VFHM700	*1350	*1350	7000	3110	8260	1885	*3-3	—	4805	4920

NOTE : (1) For height without backrest: -580mm
(2) For free lift without backrest: +580mm
(3) Weight for without backrest: -30kg
Weight for diesel model: +120kg(C240)

NOTE :

Rated capacity with (*): Shows capacity with DD: front dual tires.
Service weight of VM/VFM550-600 and of VFHM650-700 represents the weight of vehicles equipped with "SDD:special dual tires".
Lifting speed with VFM/VFHM mast: with VFM FG 420mm/s with load. 440mm/s without load.
FD 400mm/s with load. 410mm/s without load.
with VFHM FG 430mm/s with load. 450mm/s without load.
FD 420mm/s with load. 430mm/s without load.
Lowering speed with VFM/VFHM mast: 400mm/s with load. 350mm/s without load.
Overall vehicle length with VFHM mast: +15mm longer than of standard model with VM/VFM mast.

Wide View Mast

Wide View Full Free 2-Stage Mast VFW (4CYLINDER)

Mast Model	Rated Capacity/ 500mm load center (kg)		Max. Fork Height mm	Overall Mast Height		(2)Free lift with Backrest mm	Tilting Angle F/B deg	(3) Service weight(kg)		
	FG30T3 / FD30T3Z FG30C3 / FD30C3Z			Lowered mm	(1)Raised with Backrest mm			FG30T3 FG30C3		
	PNEUMATIC	UNIQUE(SE)						S	DD	SDD
VFW300	2900	2900	3000	2125	4260	900	6-12	4310	4345	4495
VFW330	2900	2900	3300	2275	4560	1050	6-12	4335	4370	4520
VFW350	2900	2900	3500	2375	4760	1150	6-12	4355	4390	4540
VFW375	2900	2900	3750	2500	5010	1275	6-6 *6-12	4375	4410	4560
VFW400	2900	2900	4000	2675	5260	1450	6-6 *6-12	4440	4475	4625

NOTE : (1) For height without backrest: -580mm
(2) For free lift without backrest: +580mm
(3) Weight for without backrest: -30kg
Weight for diesel model: +120kg(C240)

Wide View Full Free 3-Stage Mast VFHW (4CYLINDER)

Mast Model	Rated Capacity/ 500mm load center (kg)		Max. Fork Height mm	Overall Mast Height		(2)Free lift with Backrest mm	Tilting Angle F/B deg	(3) Service weight(kg)		
	FG30T3 / FD30T3Z FG30C3 / FD30C3Z			Lowered mm	(1)Raised with Backrest mm			FG30T3 FG30C3		
	PNEUMATIC	UNIQUE(SE)						S	DD	SDD
VHW435	2800 *2900	2900	4350	2125	5610	900	6-6 *6-10	4470	4505	4655
VHW480	2700 *2800	2800	4800	2275	6060	1050	6-6 *6-10	4510	4545	4695
VHW500	2600 *2750	2750	5000	2375	6260	1150	6-6 *6-10	4535	4570	4720
VHW540	1900 *2650	2500 *2650	5400	2500	6660	1275	3-6	4565	4600	4750
VHW550	1900 *2600	2350 *2600	5500	2540	6760	1315	3-6	4575	4610	4760

NOTE : (1) For height without backrest: -580mm
(2) For free lift without backrest: +580mm
(3) Weight for without backrest: -30kg
Weight for diesel model: +120kg(C240)

NOTE :

Rated capacity with (*): Shows capacity with DD: front dual tires.
Lifting speed with VFM/VFHM mast: with VFM FG 360mm/s with load. 420mm/s without load.
FD 370mm/s with load. 390mm/s without load.
with VFHM FG 380mm/s with load. 430mm/s without load.
FD 310mm/s with load. 410mm/s without load.

Lowering speed with VFM/VFHM mast: 400mm/s with load. 350mm/s without load.
Overall vehicle length with VFW/VFHW(4CYLINDER) mast: +35mm/+45mm longer than of standard model with VM mast.

Wide View Mast

Wide View Mast VM

Mast Model	Rated Capacity / 500mm load center(kg)		Max. Fork Height	Overall Mast Height		Tilting Angle F/B	(1) Service weight(kg)	
	FG/D35T3S			Lowerd	Raised with Backrest		FG35T3S	
	PNEUMATIC	UNIQUE(SE)	mm			mm	S	DD
VM250	3500	3500	2500	1885	3760	6-10	4770	4785
VM270	3500	3500	2700	1985	3960	6-10	4790	4805
VM300	3500	3500	3000	2135	4260	6-12	4820	4835
VM330	3500	3500	3300	2285	4560	6-12	4850	4865
VM350	3500	3500	3500	2385	4760	6-12	4870	4885
VM375	3500	3500	3750	2510	5010	6-6 *6-12	4890	4905
VM400	3500	3500	4000	2685	5260	6-6 *6-12	4960	4975
VM425	3500	3500	4250	2810	5510	6-6 *6-12	4985	5000
VM450	3400	3450	4500	2935	5760	6-6 *6-12	5005	5020
VM475	3400	3400	4750	3060	6010	6-6	5030	5045
VM500	3300	3350	5000	3185	6260	6-6	5055	5070
VM550	*3200	*3200	5500	3485	6760	*3-6	—	5160
VM600	*2400	*2400	6000	3735	7260	*3-6	—	5205

NOTE : (1) Weight for diesel model: +120kg(QD32)

Wide View Full Free 2-Stage Mast VFM

Mast Model	Rated Capacity / 500mm load center(kg)		Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)	
	FG/D35T3S			Lowerd	(1)Raised with Backrest			FG35T3S	
	PNEUMATIC	UNIQUE(SE)	mm			mm	S	DD	
VFM250	3500	3500	2500	1885	3760	655	6-10	4860	4875
VFM270	3500	3500	2700	1985	3960	755	6-10	4880	4895
VFM300	3500	3500	3000	2135	4260	905	6-12	4910	4925
VFM330	3500	3500	3300	2285	4560	1055	6-12	4945	4960
VFM350	3500	3500	3500	2385	4760	1155	6-12	4965	4980
VFM375	3500	3500	3750	2510	5010	1280	6-6 *6-12	4995	5010
VFM400	3500	3500	4000	2685	5260	1455	6-6 *6-12	5065	5080
VFM425	3500	3500	4250	2810	5510	1580	6-6 *6-12	5095	5110
VFM450	3400	3400	4500	2935	5760	1705	6-6 *6-12	5120	5135
VFM475	3300	3300	4750	3060	6010	1830	6-6	5145	5160
VFM500	3200	3250	5000	3185	6260	1955	6-6	5175	5190
VFM550	*3000	*3000	5500	3485	6760	2255	*3-6	—	5285
VFM600	*2400	*2400	6000	3735	7260	2505	*3-6	—	5340

NOTE : (1) For height without backrest: -445mm

(2) For free lift without backrest: +445mm

(3) Weight for without backrest: -30kg
Weight for diesel model: +120kg(QD32)

Wide View Full Free 3-Stage Mast VFHM

Mast Model	Rated Capacity / 500mm load center(kg)		Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)	
	FG/D35T3S			Lowerd	(1)Raised with Backrest			FG35T3S	
	PNEUMATIC	UNIQUE(SE)	mm			mm	S	DD	
VFHM360	3500	3500	3600	1885	4860	655	6-6 *6-10	4975	4990
VFHM400	3500	3500	4000	2010	5260	780	6-6 *6-10	5010	5025
VFHM435	3500	3500	4350	2135	5610	905	6-6 *6-10	5040	5055
VFHM480	3400	3400	4800	2285	6060	1055	6-6 *6-10	5080	5095
VFHM500	3300	3300	5000	2385	6260	1155	6-6 *6-10	5110	5125
VFHM540	2600 *3200	2700 *3200	5400	2510	6660	1280	3-6 *3-6	5140	5155
VFHM600	1600 *2400	2000 *2400	6000	2735	7260	1505	3-6 *3-6	5250	5265
VFHM650	*2000	*2000	6500	2950	7760	1720	*3-3	—	5330
VFHM700	*1600	*1600	7000	3170	8260	1940	*3-3	—	5390

NOTE : (1) For height without backrest: -530mm

(2) For free lift without backrest: +530mm

(3) Weight for without backrest: -30kg
Weight for diesel model: +120kg(QD32)

NOTE :

Rated capacity with (*): Shows capacity with front dual tires.

Lifting speed with VFM/VFHM mast: with VFM 390mm/s with load. 410mm/s without load.
with VFHM 450mm/s with load. 470mm/s without load.

Lowering speed with VFM/VFHM mast: 440mm/s with load. 380mm/s without load.

Overall vehicle length with VFHM mast: +15mm longer than of standard model with VM/VFM mast.

STANDARD EQUIPMENT AND ACCESSORIES

[Equipment]

- Adjustable ORS seat with belt
- Asbestos-free brake shoe materials
- Cylinder type bonnet latch with locking function
- Donaldson dry type cyclopac air-cleaner
- Drawbar device
- Durable overhead guard with resin screen
- Engine auto glow system (Diesel)
- Engine idle-up device(Gasoline)
- Flow control valve
- Fuel water sedimenter (Diesel)
- Full hydrostatic power steering
- Full transistorized ignition (Gasoline)
- Hydraulic oil dipstick
- Interlock system¹⁾
- ITA class III carriage
- J-lug pneumatic industrial tires
- Lift circuit cut-off valve
- Load backrest
- Radiator coolant reservoir
- Return hydraulic filter
- Suction hydraulic strainer
- Tilt lock valve
- Transmission oil dipstick (power shift T/M)
- Transmission oil filter (power shift T/M)
- Wide view two stage mast(VM300)
- 1070mm forks
- 2-spool control valve with pressure relief

[Controls]

- Electric shift control lever (direction change)
- Lift and tilt levers
- Multi-function switch lever with self-cancelling mechanism (Lighting & turn-signal)
- Parking brake lever with inter-lock
- Tilt adjustable steering post
- Neutral safety mechanism

[Accessories]

- Access-assisted hand grip
- Back-up buzzer
- Back-up lights
- Deluxe floor mat
- Detachle and portable glove box
- Electric horn
- Front combination lights (turn signal, clearance)
- Head lights - traffic purpose
- High-mounted rear combination lights
- Operator tool kit
- Pen/ Cup holder
- Side view mirrors

[Instruments and Switch]

- Charge indicator
- Engine oil pressure warning indicator
- Fuel gauge
- Glow indicator (Diesel)
- Hourmeter
- Ignition key engine stop (Diesel)
- Neutral safety switch
- Fuel water sedimenter indicator (Diesel)
- Water temperature gauge

NOTE :

Meets following major standards and code:

ISO22915-2 Counter Balanced Lift Trucks, Stability & Safety Test(Int'l)

ISO 3691 Powered industrial trucks - safety code

JIS D6001 Industrial Lift Trucks (Japan)

ISO D6011 Stability & Safety Test (Japan)

Overhead guard meets ISO 6055, JIS D6021

Specifications are subject to change without notice and its may vary depending on markets.

Please consult your TCM representative for details.

OPTIONAL LOADING ATTACHMENT

- Alternative fork lengths
- Alternative lengths fork extension sleeve
- Bale clamp (LG)
- Carton clamp(2-3t) (CLG)
- Crane arm (CA)
- Drum clamp(2-3t) (DLG)
- Fork clamp(2-3t) (FLG)
- Fork positioner hydraulic type(Hook-on/ Integral)(FS)
- Fork positioner manual type
- High, wide type load backrest
- Hinged forks/ scoop (HFS)
- Load push-pull(2-3t) (PPC)
- Load stabilizer(2-3t) (STA)
- Ram attachment (RA)
- Rotating forks (Hook-on/ Integral type) (RF)
- Rotating paper roll clamp (Hook-on/ Integral type)(PR)
- Side-shifter(Hook-on/ Integral) (SS)
- Sleeve-in hook
- Wide type fork carriage
- Wide view full free 2-stage (VFM) mast
- Wide view full free 3-stage (VFHM) mast
- Wide view full free 2-stage 4cyl (VFW) mast(2-3t)
- Wide view full free 3-stage 4cyl (VFHW) mast(2-3t)

OPTIONAL EQUIPMENT AND ACCESSORIES

[Equipment]

- Auxiliary hydraulic valve modules(max. 5spool)
- Cabin - panel type(SCBPA)
- Central greasing system (CL)
- Color tire (white, green)
- Dual element aircleaner(ADE)
- Exhaust purify catalytic muffler(EPM)(Diesel)
- Fingertip hydraulic valve control (FIT)
- Fishery industry package (FC)(2-3t)
- Front dual drive wheels(DD/ SDD)
- Full open cabine(AW 061)
- Heater(HR)
- Heater & defroster (DEF)
- High capacity radiator - High power model(RAD PF2)
- Interlock system¹⁾ (SIL)
- Lift lock mechanism (VLL)
- Load sensing valve (VLS)
- LPG exclusive/ Dual fuel(LPG - Gasoline) package
- Non-slip differential(power shift T/M)
- Oil clutch(manual T/M)
- Overhead exhaust system(TUE)
- Overhead guard/ High profile
- Overhead guard/ Low profile
- Plate fin type radiator(RAD PF)
- Power clutch(manual T/M)
- Pre-cleaner engine air intake(CAK B)(Gasoline)
- Radiator dust screen (fine, medium mesh)
- Smoke reduction/spark arrester muffler (Diesel)
- Steel cabin - enclosed type(SCB 001)
- Synchronised steering mechanism(SRS)
- Unique cushion tires(SE)
- Windshield wiper

[Accessories]

- Custom paint-work
- Fire extinguisher(FE)
- Rear working light(RWL)
- Rotating warning light(RLY/RLR)
- Tilt cylinder boots(TLB)




[Instruments and Switch]

- Ammeter (AM)
- O.K. monitor (fuel level, battery electrolyte level, coolant level, parking brake, air-cleaner, seat-belt)
- Speedometer (SM)
- Torque converter oil pressure gauge (TPM)
- Torque converter oil temperature gauge (power shift T/M)

Others on request

NOTE : 1) STD for EXE specification

GROUND CLEARANCE	FD / FG20-25	FD / FG30	FD/FG35T3S
	FHG20-25 mm	FHG30 mm	mm
Mast	110	140	145
Frame	120	145	190
Front axle	125	145	165
Rear axle	150	175	185
Counter weight	155	185	225

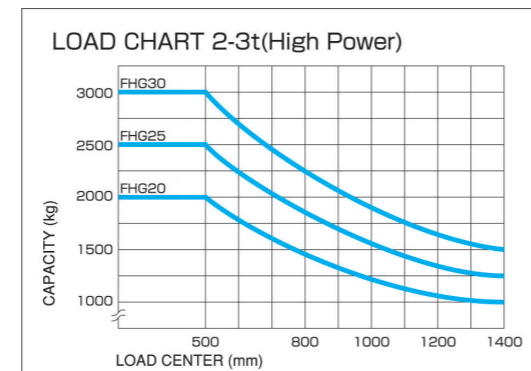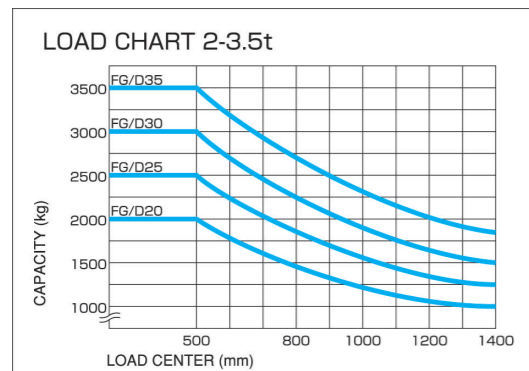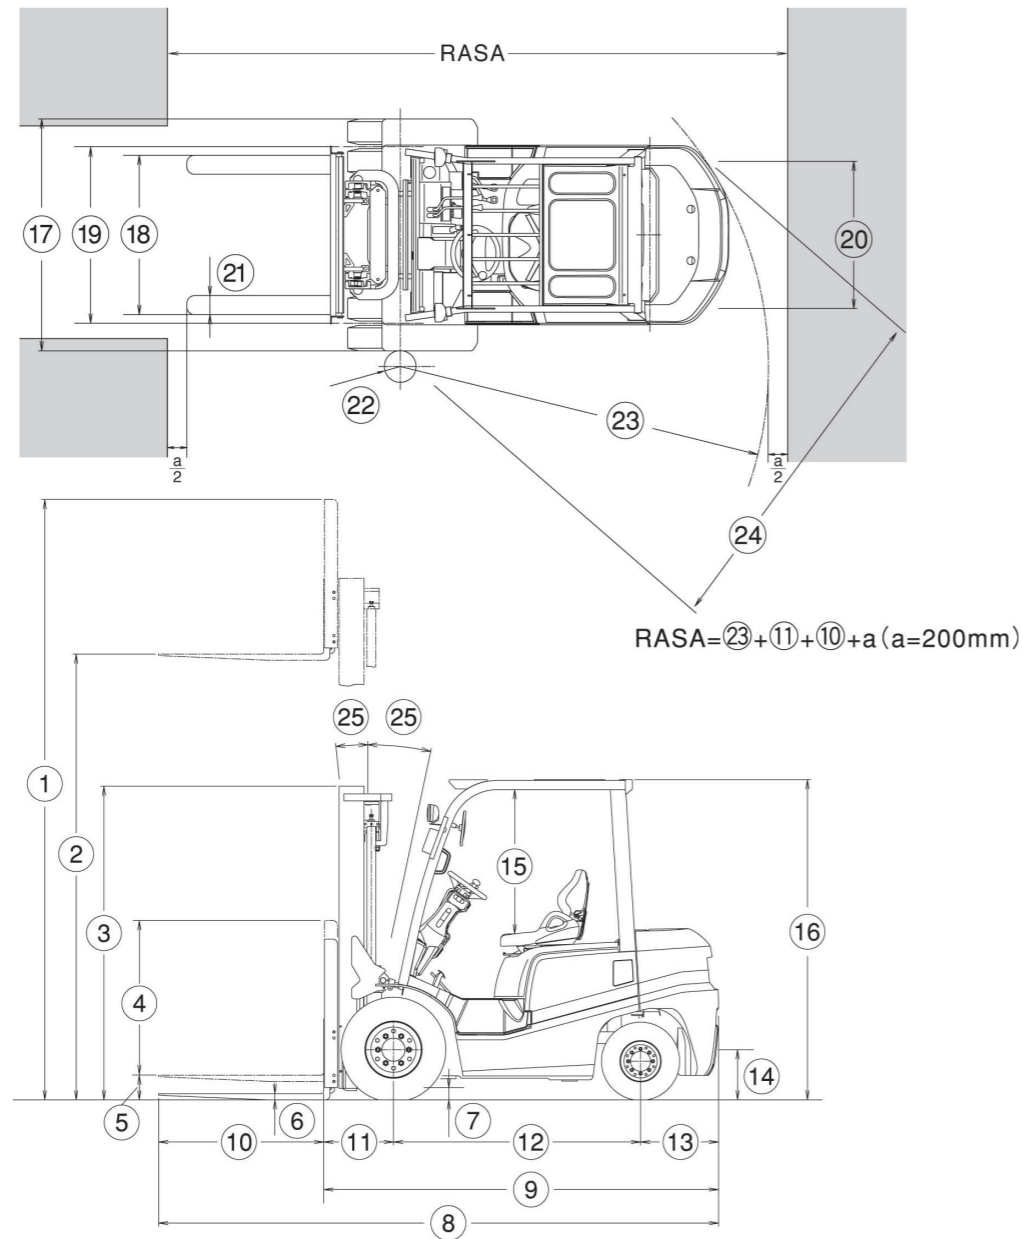

STANDARD DIMENSIONS

STANDARD DIMENSIONS

Model	FD / FG20	FD / FG25	FD / FG30	FD/FG35T3S
	FHG20 mm	FHG25 mm	FHG30 mm	mm
① Overall height, fork raised(with backrest)	4030	4030	4260	4255
② Maximum fork height	3000	3000	3000	3000
③ Mast height, fork lowered	2030	2030	2075	2135
④ Backrest height	1000	1000	1220	1220
⑤ Free lift	110	110	165	170
⑥ Fork thickness	40	40	45	50
⑦ Ground clearance(front axle)	125	125	145	145/165
⑧ Overall length(with forks)	3555	3625	3775	3870
⑨ Length to fork face	2485	2555	2705	2800
⑩ Fork length	1070	1070	1070	1070
⑪ Load distance(centerline of front axle to front face of forks)	450	450	480	495
⑫ Wheelbase	1600	1600	1700	1700
⑬ Rear overhang	435	505	525	605
⑭ Drawbar Pin Center Height	530	530	560	610
⑮ Overhead guard clearance(from face of seat)*	1005	1005	1005	1005
⑯ Overall height(overhead guard)*	2070	2070	2090	2140
⑰ Overall width	1150	1150	1225	1290
⑱ Fork spread(outside)	245 - 1020	245 - 1020	250 - 1090	300 - 1090
⑲ Tread (front)	970	970	1000	1060
⑳ Tread (rear)	970	970	970	970
㉑ Fork width	122	122	125	150
㉒ Inside turning radius	160	160	200	200
㉓ Outside turning radius	2170	2240	2400	2470
㉔ Minimum intersecting aisle	2210	2230	2330	2390/2380
㉕ Tilt angles(forward-backward)	6° - 12°	6° - 12°	6° - 12°	6° - 12°

NOTE : *Oceania(EXC) and European export trucks(EXE): +60mm

DIMENSIONS WITH FRONT DUAL DRIVE WHEELS (option)

Model	FD / FG20	FD / FG25	FD / FG30	FD/FG35T3S
	FHG20	FHG25	FHG30	mm
Tire size (front dual Type: DD)				
	4 x 5.50-15-8PR(I)		4 x 6.00-15-10PR(I)	
	mm	mm	mm	mm
⑰ Overall width	1480	1480	1520	1600
⑲ Tread (front)	1130	1130	1170	1230
㉒ Inside turning radius	100	100	100	100
㉓ Outside turning radius	2240	2310	2430	2540
㉔ Minimum intersecting aisle	2320	2340	2445	2500
Tire size (front dual Type: SDD)				
	4 x 7.00 -12-12PR(I)		4 x 28 x 9-15-12PR(I)	
	mm	mm	mm	mm
⑰ Overall width	1590	1590	1750	—
⑲ Tread (front)	1190	1190	1260	—
㉒ Inside turning radius	100	100	100	—
㉓ Outside turning radius	2280	2350	2500	—
㉔ Minimum intersecting aisle	2370	2380	2490	—



- UniCarriers Corporation retains the right to change these products and specifications without incurring any obligation relating to such changes.
- These products and specifications are subject to change without notice.
- Photos and illustrations may slightly differ from the actual trucks.
- Photos and illustrations may or may not include optional equipment and accessories.
- Features and specifications may vary depending on markets.
- Performance data and dimensions are nominal and subject to tolerances.
- Produced in ISO certified factory.